

Canon

JCS-HR5U

Compact HDMI/USB 3.0 HD Video Camera



Features user-controlled H/V digital crosshair lines

CANON MEDICAL COMPONENTS U.S.A. Video Sensing Devices introduces the new JCS-HR5U camera. The real-time 60 fps full HD USB 3.0 video camera represents an important advancement in clinical microscopy imaging applications. The ultra-compact camera features both HDMI® and SuperSpeed USB image outputs for *simultaneous*, real-time live viewing from a monitor plus high-res image capture to a computer. It is optimal for color documentation systems integration in the fields of bio imaging, scientific imaging, and live tissue imaging.

The 1.75" x 1.75" x 3" camera integrates easily with any clinical microscope using a C-mount lens adapter. Incorporating the latest CMOS sensor technology and advanced image processing provides exceptional sensitivity and color accuracy for a real-time video solution.



JCS-HR5U

Compact HDMI/USB 3.0 HD Video Camera

FULL HD, ULTRA-COMPACT DUAL-OUTPUT VIDEO CAMERA
HDMI & USB 3.0

Performance Specifications

JCS-HR5U

Image sensor	1/2.8 inch color CMOS sensor (progressive scan, rolling shutter)
Lens mount	C mount
Image output	HDMI 1.4a 4:4:4 : 1920 x 1080 / 59.94Hz USB 3.0 (UVC1.1 compliant YUV4:2:2 : USB 3.1 Gen 1) 1920 x 1080 / 59.94fps (USB 3.0 mode theoretical maximum) 1920 x 1080 / 10fps (USB 2.0 mode theoretical maximum)
Sensitivity	F10 standard (2000lx, 3100K, gain OFF, gamma OFF, 59.94Hz); F11 standard (2000lx, 3100K, gain OFF, gamma OFF, 50Hz)
Minimum illumination	4lx standard (F1.4, 3100K, gain +20dB, gamma OFF, 59.94Hz) 3.3lx standard (F1.4, 3100K, gain +20dB, gamma OFF, 50Hz)
Power requirements	DC12V± 10%, power consumption approx. 4.5W
Environmental	0°C ~ + 40°C (32°F ~ +104°F) operating -20°C ~ + 60°C (-4°F ~ +140°F) non-operating Humidity 90% or less non-condensing
Gain	AUTO / MANUAL : 0 ~ 20dB / OFF
White balance	AWB (Automatic White Balance) / MANUAL
Shutter	AUTO / MANUAL (OFF ~ 1/10000s)
Image optimization function	MATRIX color correction (12 colors), gamma correction, detail gain, master pedestal chroma gain setting, knee correction
Special function	Flip / mirror, digital crosshair lines


This Class A digital apparatus complies with Canadian ICES-003.

Exterior Dimensions

Measurements in Millimeters (Inches)

FRONT

44 (1.73)

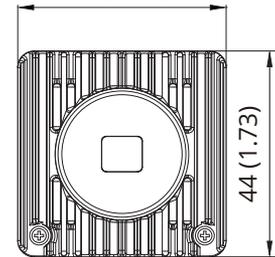


44 (1.73)


SIDE

78.1 (3.075)

6.3 (0.248)

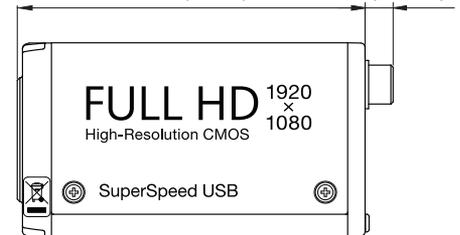

REAR




Weight approx. 170 g (0.375 lbs)

Output & connector format;
HDMI 1.4a Type A terminal
USB Video Class,
UVC 1.1 Micro-B connector
USB 3.1, Gen 1

Connections

JCS-HR5U

Ultra-Compact Camera
(Lens not included)

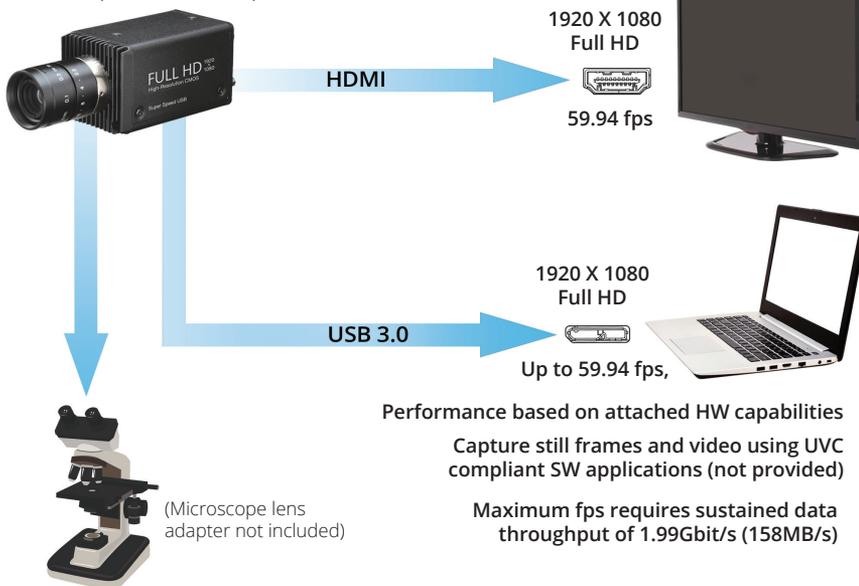

Performance based on attached HW capabilities

Capture still frames and video using UVC compliant SW applications (not provided)

Maximum fps requires sustained data throughput of 1.99Gbit/s (158MB/s)



CANON MEDICAL COMPONENTS U.S.A., INC. Video Sensing Devices
<https://mccu.canon/VSD> | 2355 Main Street, Suite 150, Irvine, California 92614

© 2023 CANON MEDICAL COMPONENTS U.S.A., INC. All rights reserved. All products and names mentioned are the property of their respective owners. While Canon has made every effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system/component/options availability are all subject to change without notice.